

Move CAB files to New Archives folder

EventTracker Version 7.x and above

Publication Date: Sept. 8, 2016

EventTracker
8815 Centre Park Drive
Columbia MD 21045
www.eventtracker.com

Abstract

In case of insufficient disk space or for better warehousing purpose, one feels the need of moving the cab files from one location to another. For the user convenience, EventTracker has this provision to move the cab files/Archives folder to any location within the system or to other remote location.

Purpose

The purpose of this document is to help user(s) understand the procedure to change the Archives path.

Intended Audience

Administrator or technical experts, who wish to change the Archives folder/cab files location.

Scope

The instructions mentioned in this document can be executed on EventTracker 7.x and above.

The information contained in this document represents the current view of Prism Microsystems Inc. on the issues discussed as of the date of publication. Because Prism Microsystems must respond to changing market conditions, it should not be interpreted to be a commitment on the part of Prism Microsystems, and Prism Microsystems cannot guarantee the accuracy of any information presented after the date of publication.

This document is for informational purposes only. Prism Microsystems MAKES NO WARRANTIES, EXPRESS OR IMPLIED, AS TO THE INFORMATION IN THIS DOCUMENT.

Complying with all applicable copyright laws is the responsibility of the user. Without limiting the rights under copyright, this paper may be freely distributed without permission from Prism, as long as its content is unaltered, nothing is added to the content and credit to Prism is provided.

Prism Microsystems may have patents, patent applications, trademarks, copyrights, or other intellectual property rights covering subject matter in this document. Except as expressly provided in any written license agreement from Prism Microsystems, the furnishing of this document does not give you any license to these patents, trademarks, copyrights, or other intellectual property.

The example companies, organizations, products, people and events depicted herein are fictitious. No association with any real company, organization, product, person or event is intended or should be inferred.

© 2016 Prism Microsystems Corporation. All rights reserved. The names of actual companies and products mentioned herein may be the trademarks of their respective owners.

Table of Contents

- Abstract..... 1
 - Purpose..... 1
 - Intended Audience..... 1
 - Scope..... 1
- Move Cab files to new Archives folder 3
 - Changes to be done on the Remote system..... 3
 - Changes to be done on the Local system 10
 - Changes to be done in the 'Services.msc' 17

Move Cab files to new Archives folder

Changes to be done on the Remote system

1. Create **Archive** folder and share the folder on the remote system.

For example: Create a new folder 'Webdoc2' in the remote system.

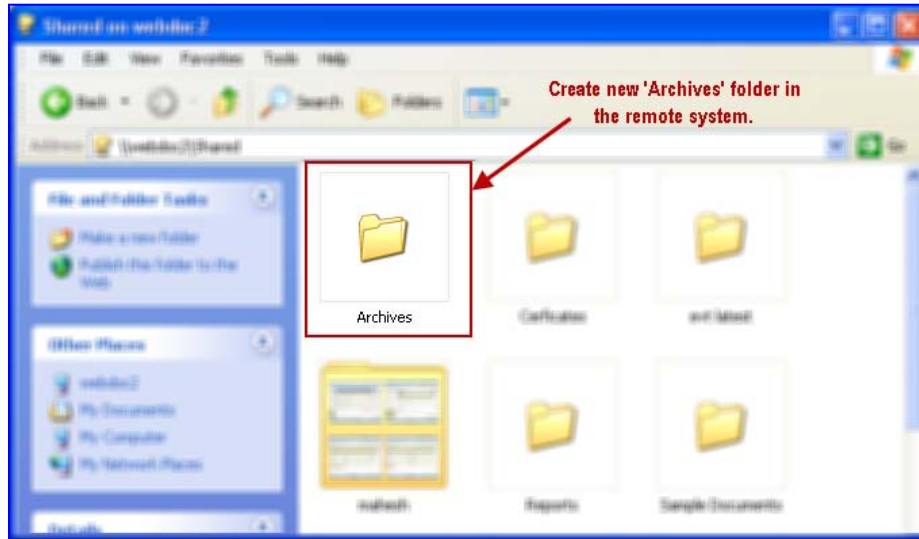


Figure 1

2. Right click on the newly created **Archives** folder, and then click **Properties**.
Archives properties dialog box appears on the desktop.
3. Click the **Sharing** tab.

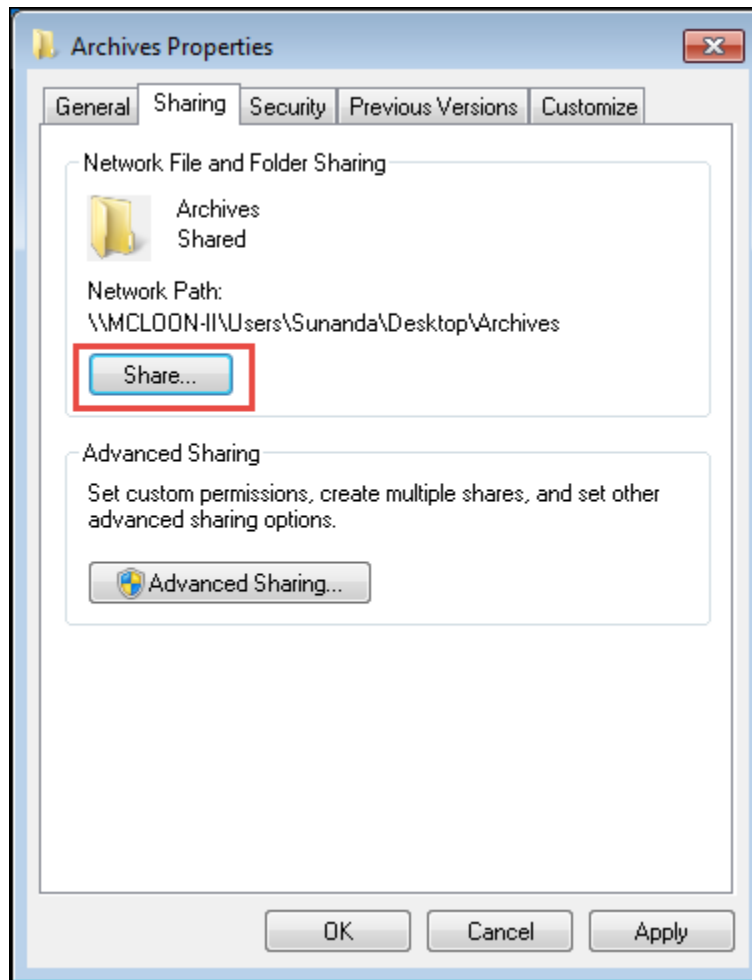


Figure 2

4. Click the **Share** button and assign permission to the user.

NOTE:

1. You are requested to share it with relevant users only.
2. "**EventTracker Configuration**" must be performed with a user who has full permissions to access UNC path (Archive Directory).

** 'UNC Path is not supported, if the "**EventTracker Configuration**" is running with local authenticated user".

The File Sharing dialog box displays.

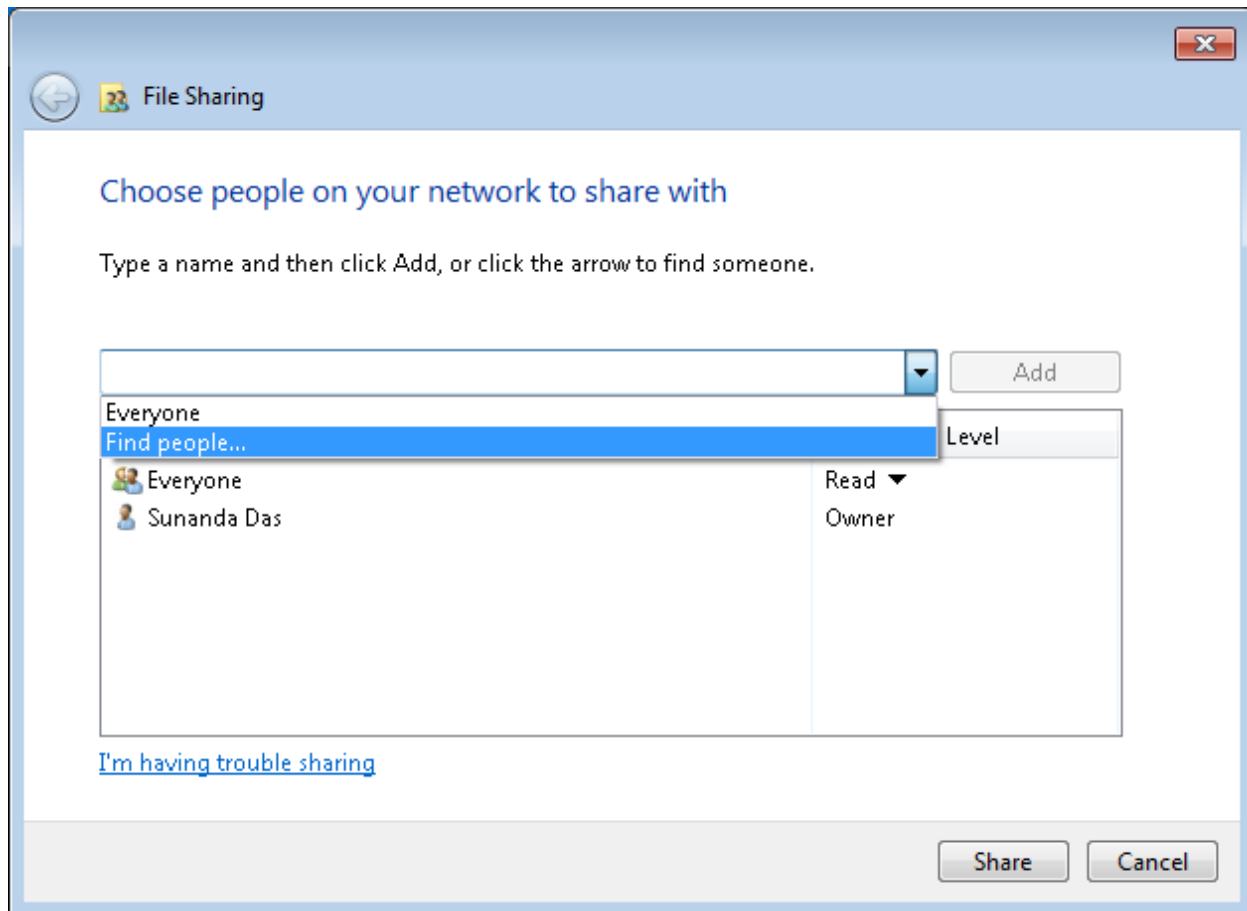


Figure 3

- From the dropdown option select 'Find People'.
Select Users, Computers, or Groups dialog box will appear on the desktop.

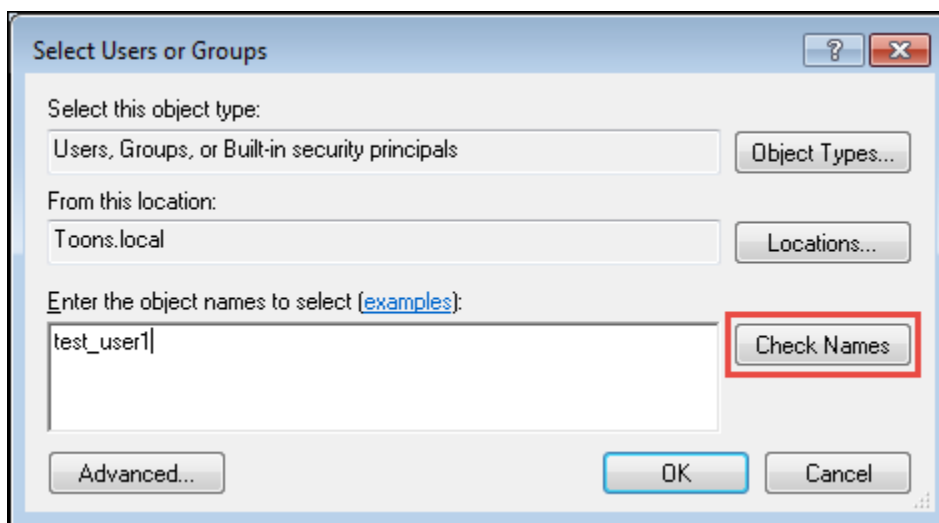


Figure 4

6. Enter the user name, and then click the **Check Names** button.

You need to enter the user name on which the service is running. **Check Names** will verify the availability of the user name entered, and will display the email ID of the given user (Refer Figure 5).

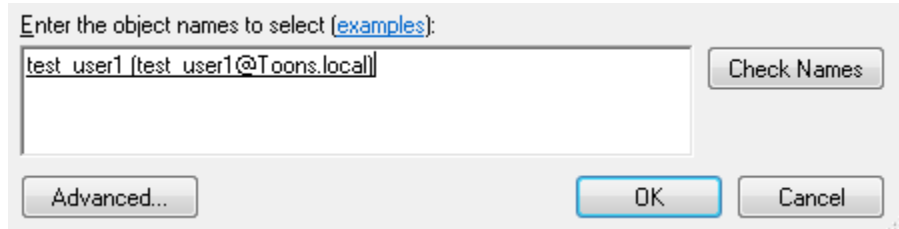


Figure 5

7. Click the **OK** button.
The user gets listed.

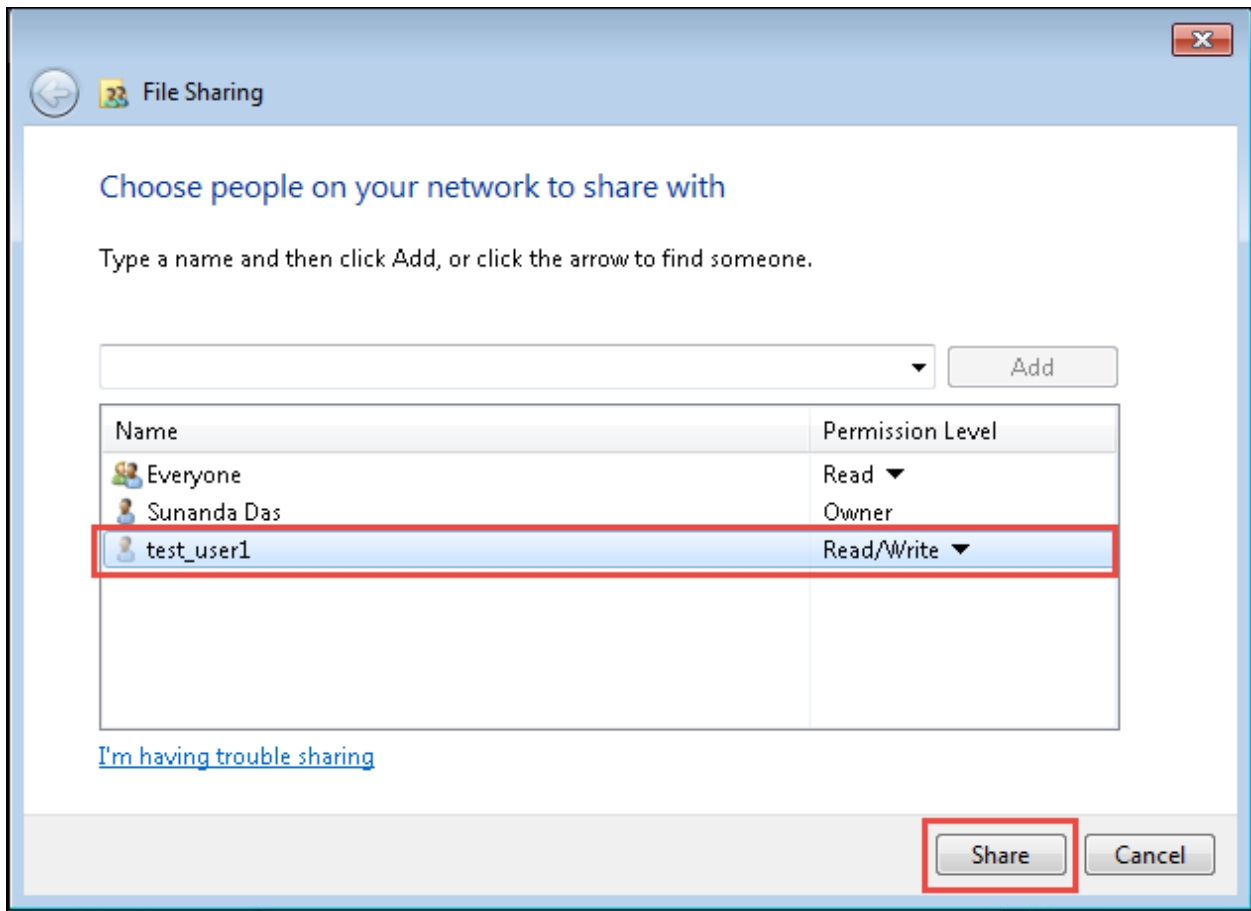


Figure 6

The below page displays:

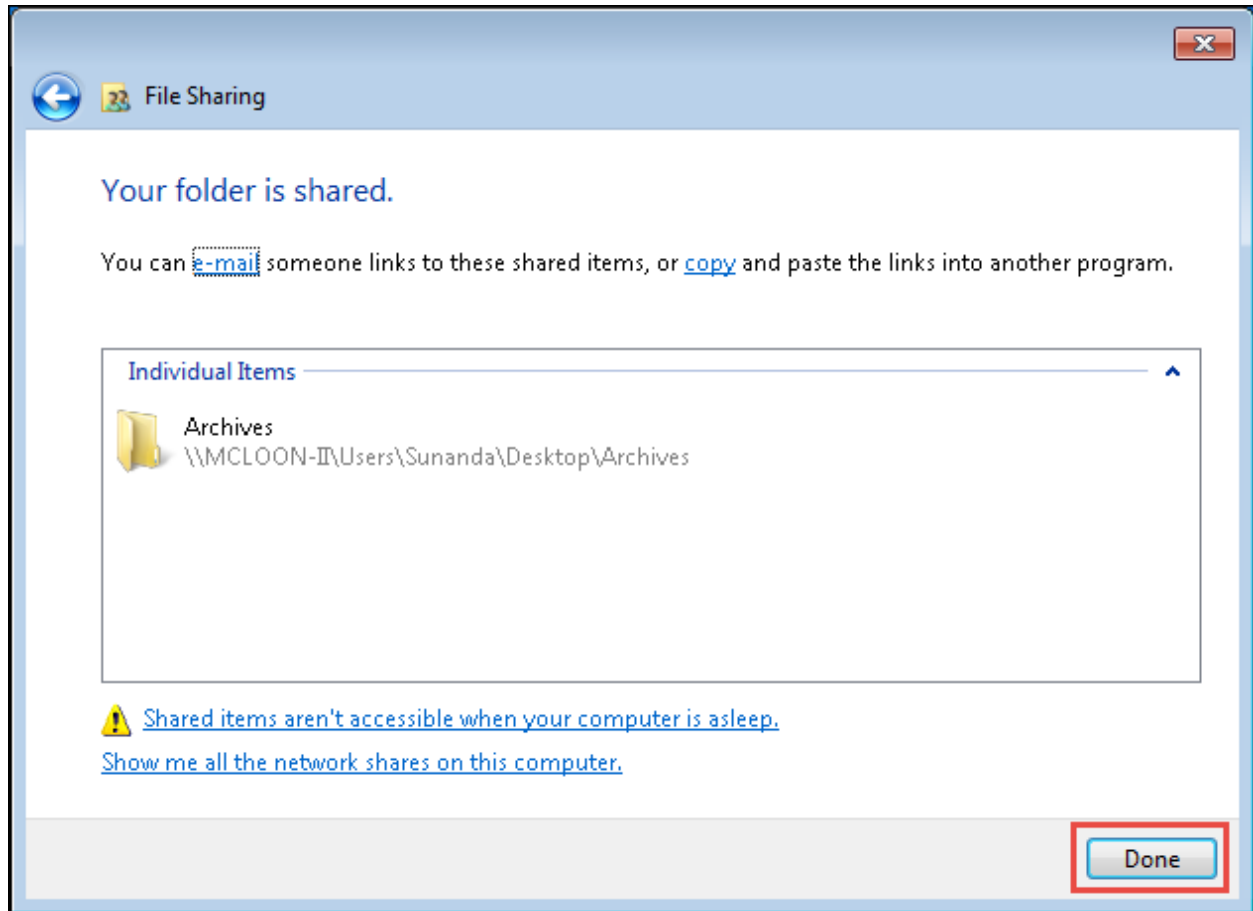


Figure 7

8. Click on **Done**.
The folder gets shared with the user.
9. Now, click the **Security** tab.
10. Select the username and click the **Edit** button

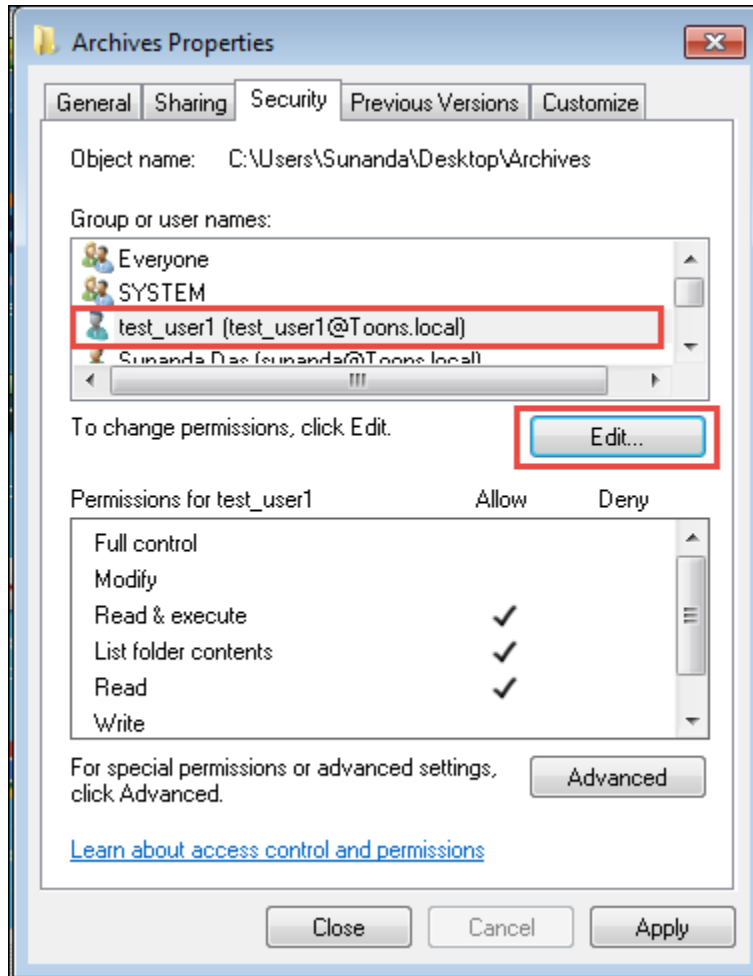


Figure 8

Permission for Archives dialog box displays

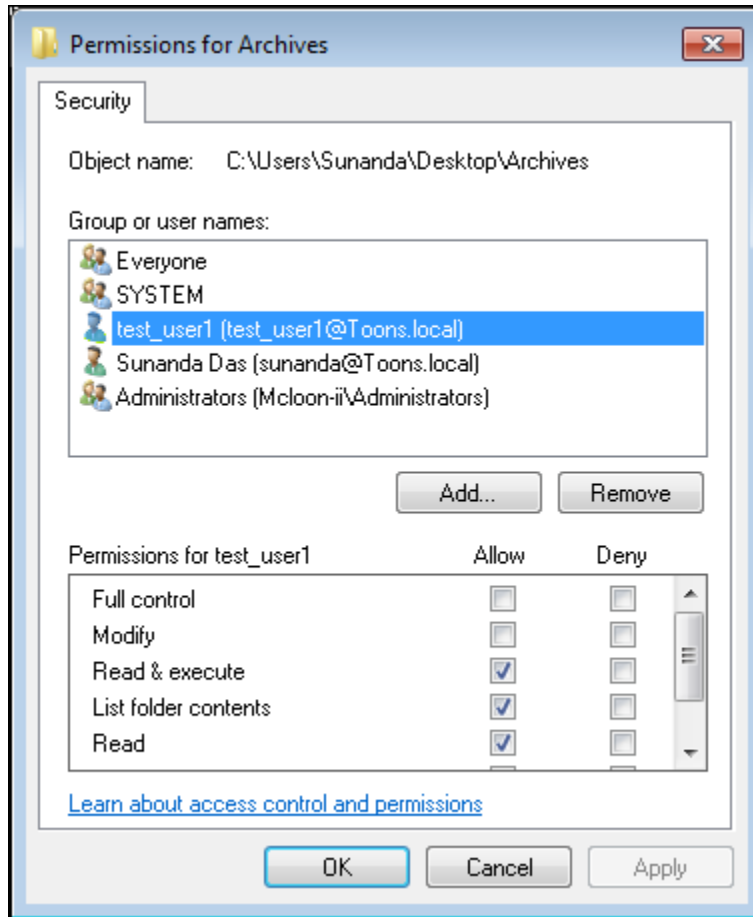


Figure 9

11. Click **Allow** checkbox to access **Full Control** permission, and then click the **Apply** button.

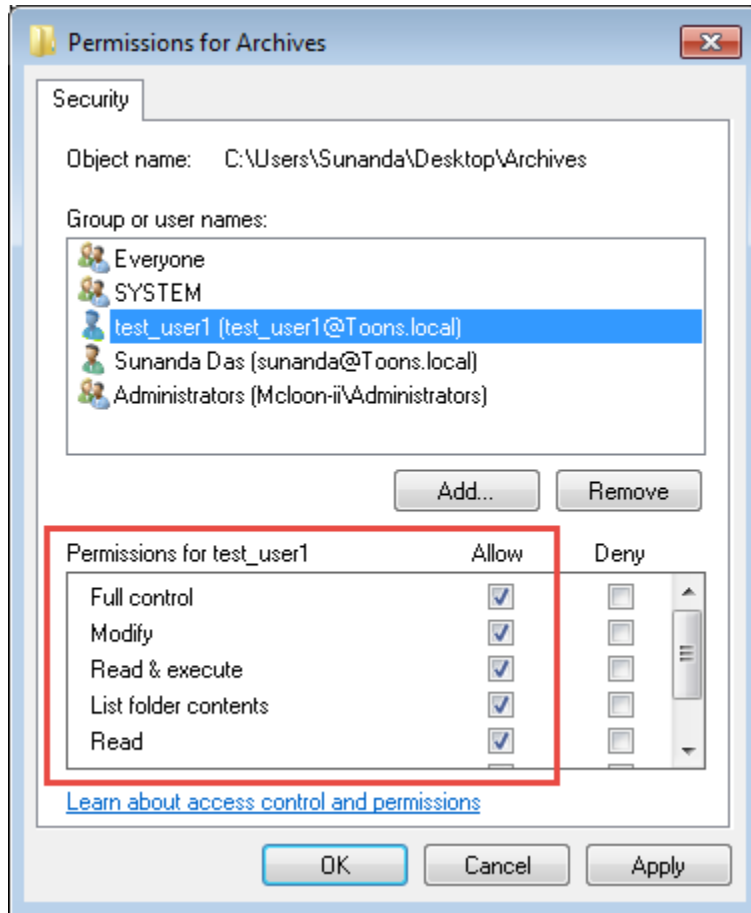


Figure 10

12. Click the **OK** button to accept the changes.

NOTE: Local Administrator permission should not be deleted from shared folder security tab.

Changes to be done on the Local system

After creating 'Archives' folder in the remote system, you need to change the default **Archives path** to direct the cab files to the newly created 'Archives' folder. The configurations can be done in **EventTracker Control Panel >> EventVault**.



Figure 11

1. Open **EventTracker Control panel**, and click **EventVault**.
EventTracker opens **EventVault Warehouse Manager** window.

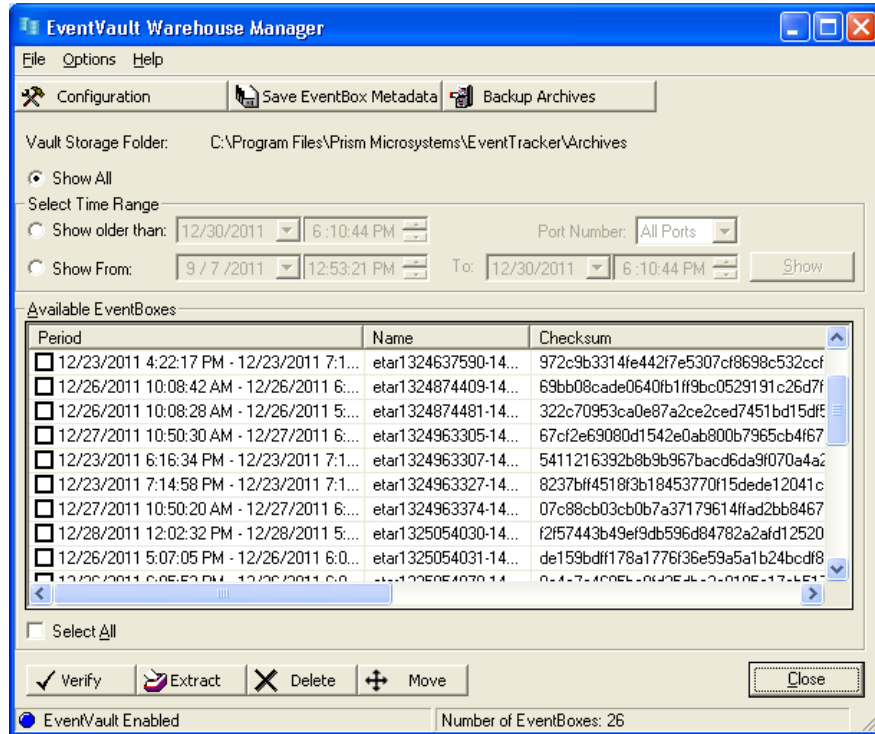


Figure 12

2. Click the **Configuration** Tab.

EventTracker opens Configuration dialog box.

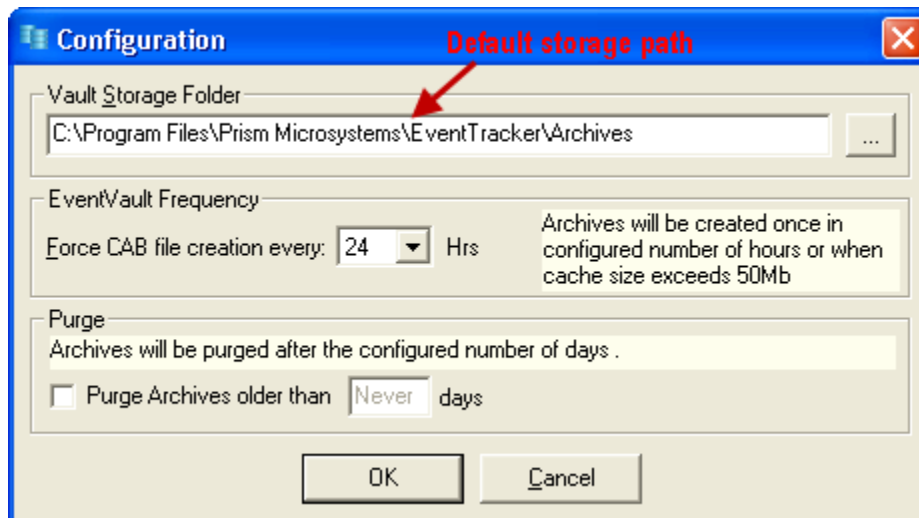


Figure 13

In order to move cab files from local system (e.g. Mcloon) to remote system (e.g. Webdoc2); you need to replace the default storage path with the newly created **Archives** folder path of the remote system.

3. Click the **Browse**  button.

EventTracker displays **Choose Directory** dialog box, which will show the local system's default storage path of the 'Archives' folder.

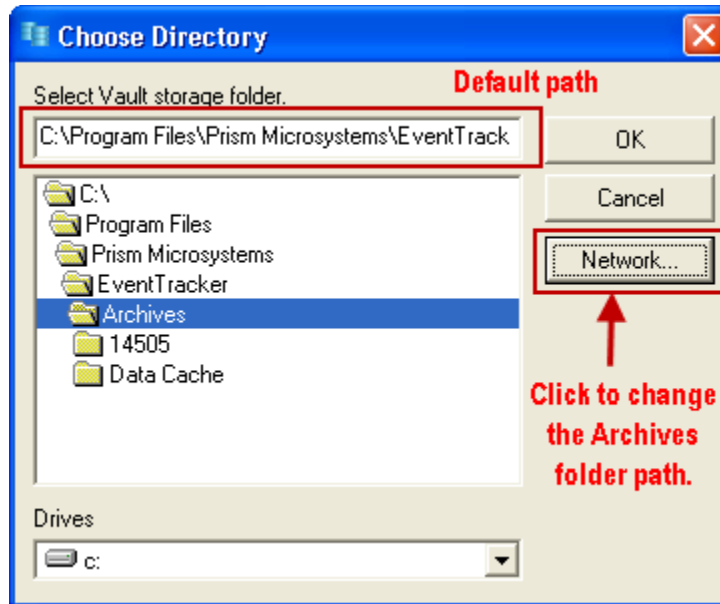


Figure 14

4. Click the **Network** button.

EventTracker opens Browse for Folder window.

5. Search for the **Archives** folder created earlier in the remote system's shared folder.

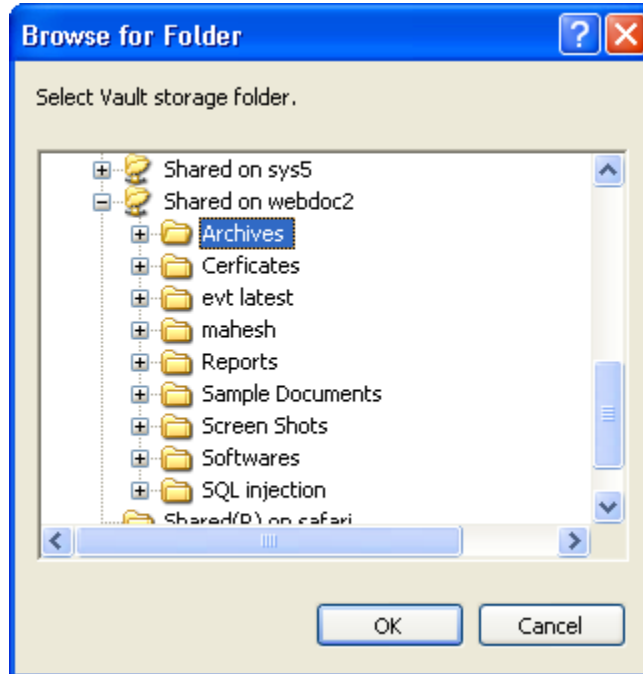


Figure 15

6. Select the folder, and then click the **OK** button.

EventTracker returns to the **Choose Directory** dialog box which will now display the newly selected Vault Storage path.

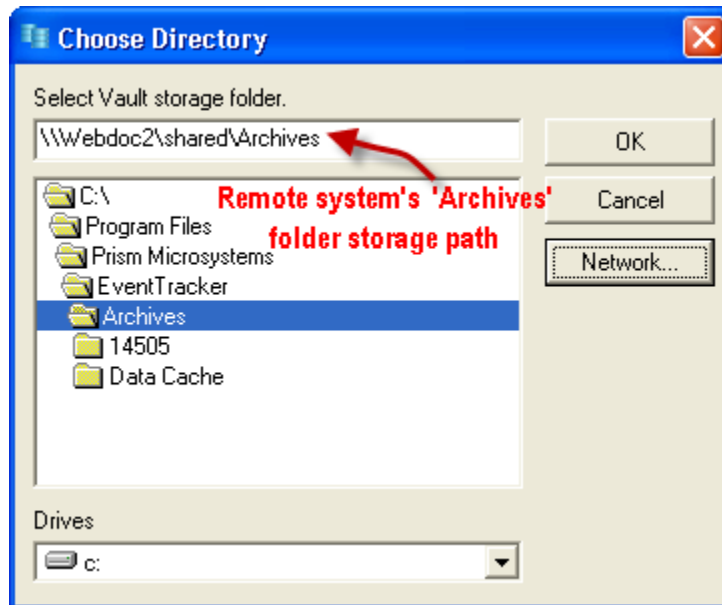


Figure 16

7. Click the **OK** button.

EventTracker returns to the **Configuration** window, which displays changed storage location.

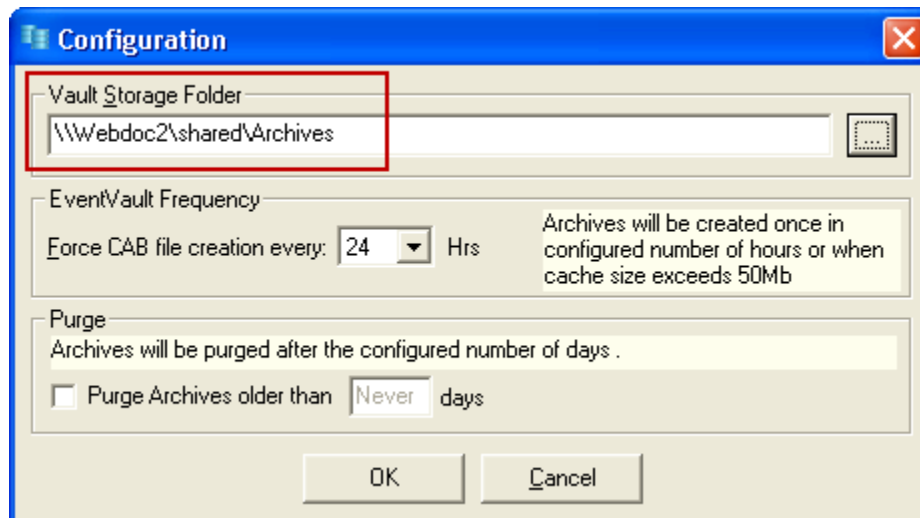


Figure 17

8. Click the **OK** button.

EventTracker displays confirmation message.



Figure 18

9. Click the **Yes** button, if you wish to move the existing archives in the new folder.

EventTracker displays **Move Archives** dialog box.

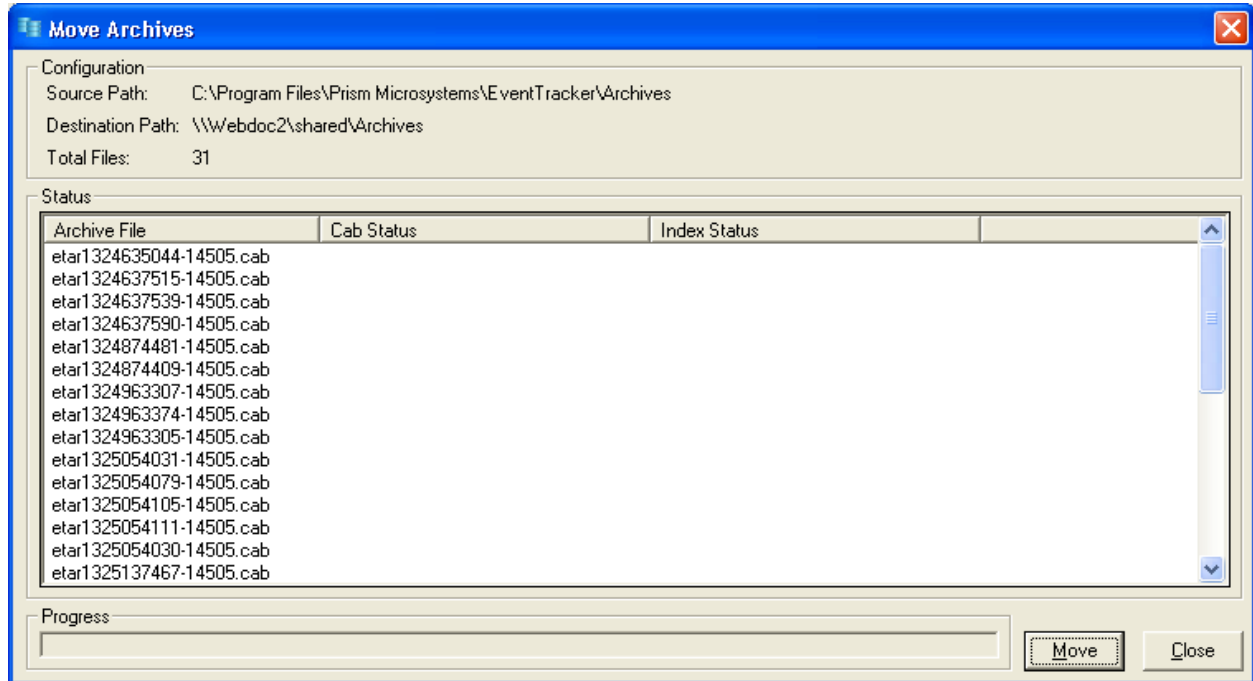


Figure 19

10. Click the **Move** button.

All the cab files will automatically move to the destination path.

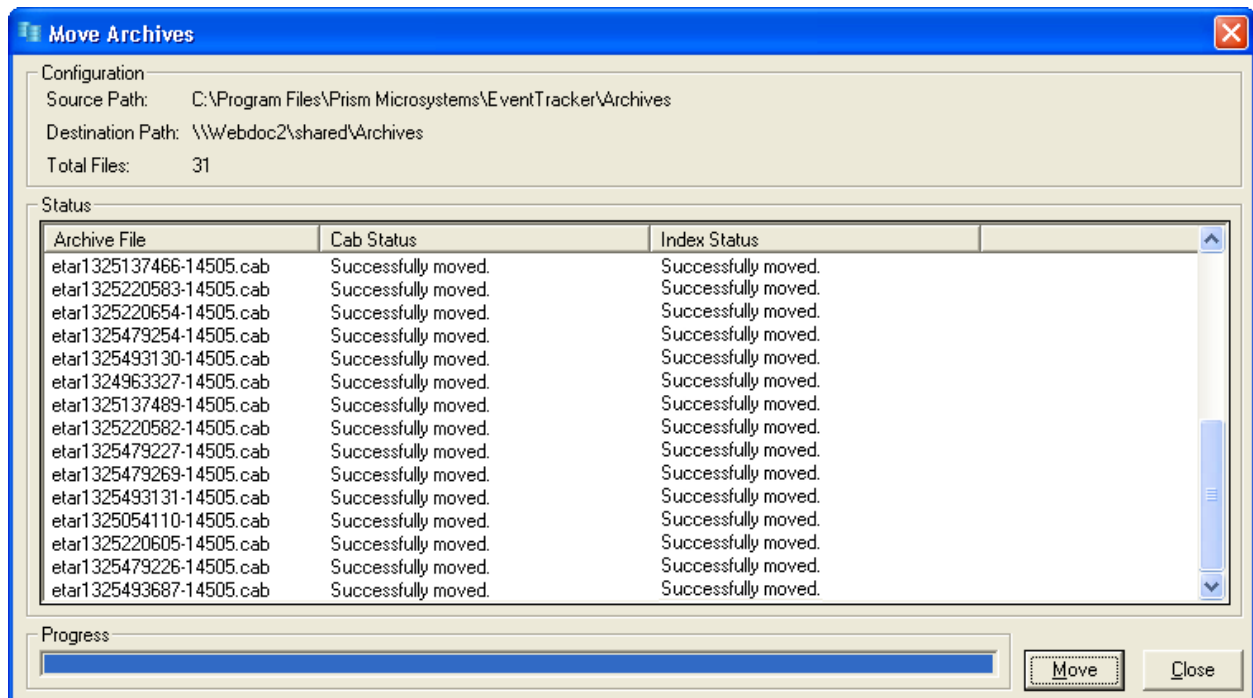


Figure 20

11. Click the **Close** button.

Changes to be done in the 'Services.msc'

If the user is setting UNC path (Uniform Naming Convention), then service account of EventTracker Scheduler, EventTracker EventVault, EventTracker Reporter, EventTracker Indexer and Event Correlator (if available) services should be made to run on the user account which will have full permission on the set UNC path.

1. Open the 'EventTracker Configuration' from the **Start** button, and 'Run as administrator'.

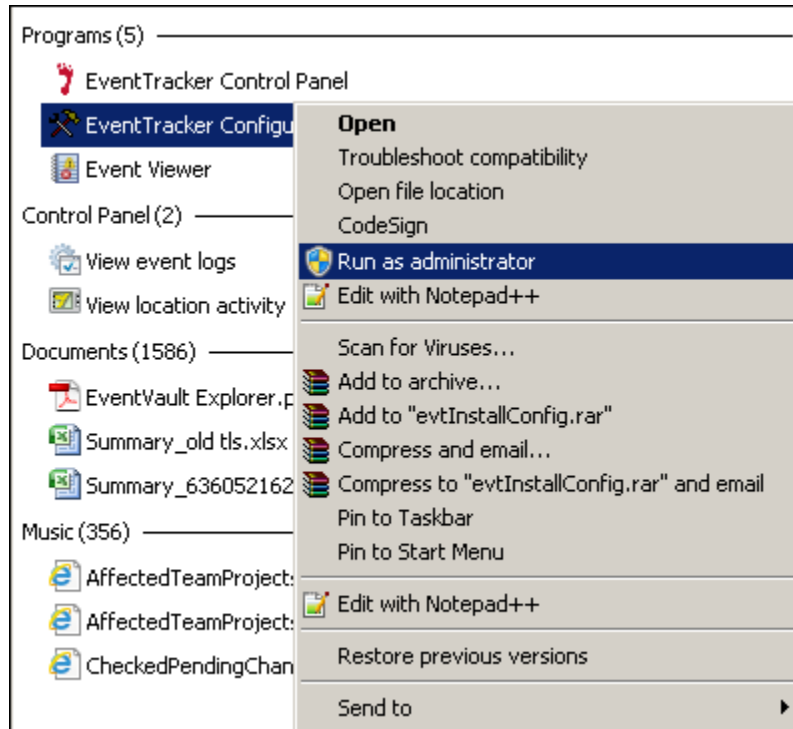


Figure 21

2. Configure the same with a user who has full permissions to access the shared archives folder.

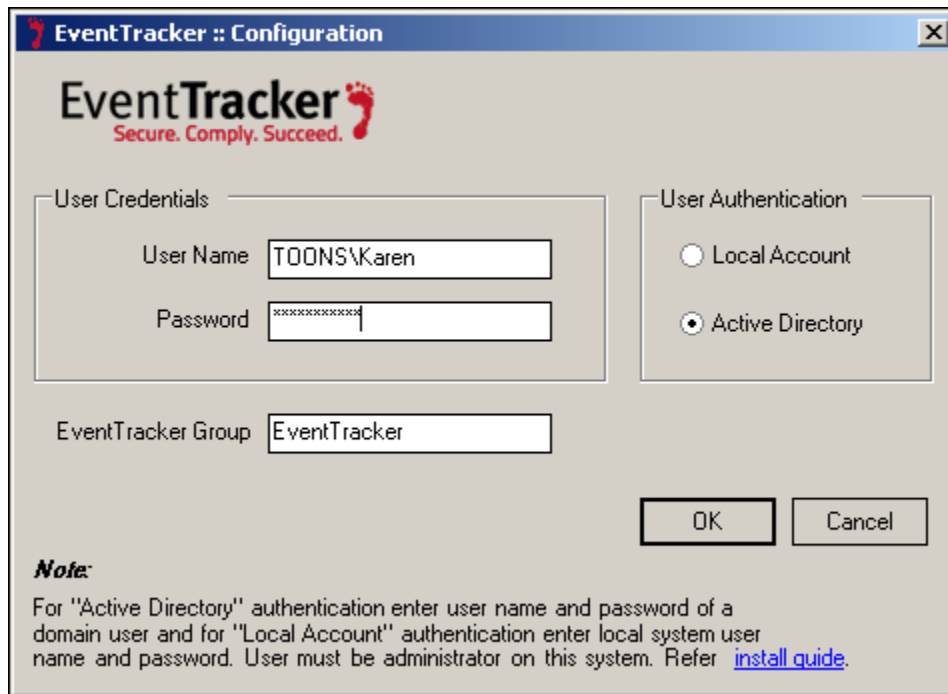


Figure 22

** "Karen" has full permissions to access the archives UNC path.

NOTE: Please ignore the above steps, if it is already configured with the required user.

1. Click the **Start** button, and select **Run**.
2. Type **services.msc**, and then click the **OK** button.

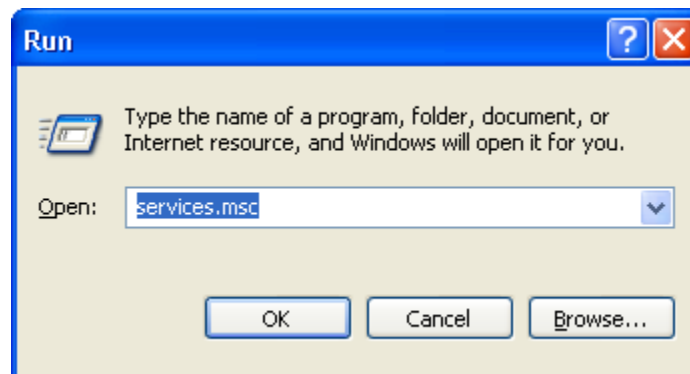


Figure 23

3. In the **Services** window, search for EventTracker services.

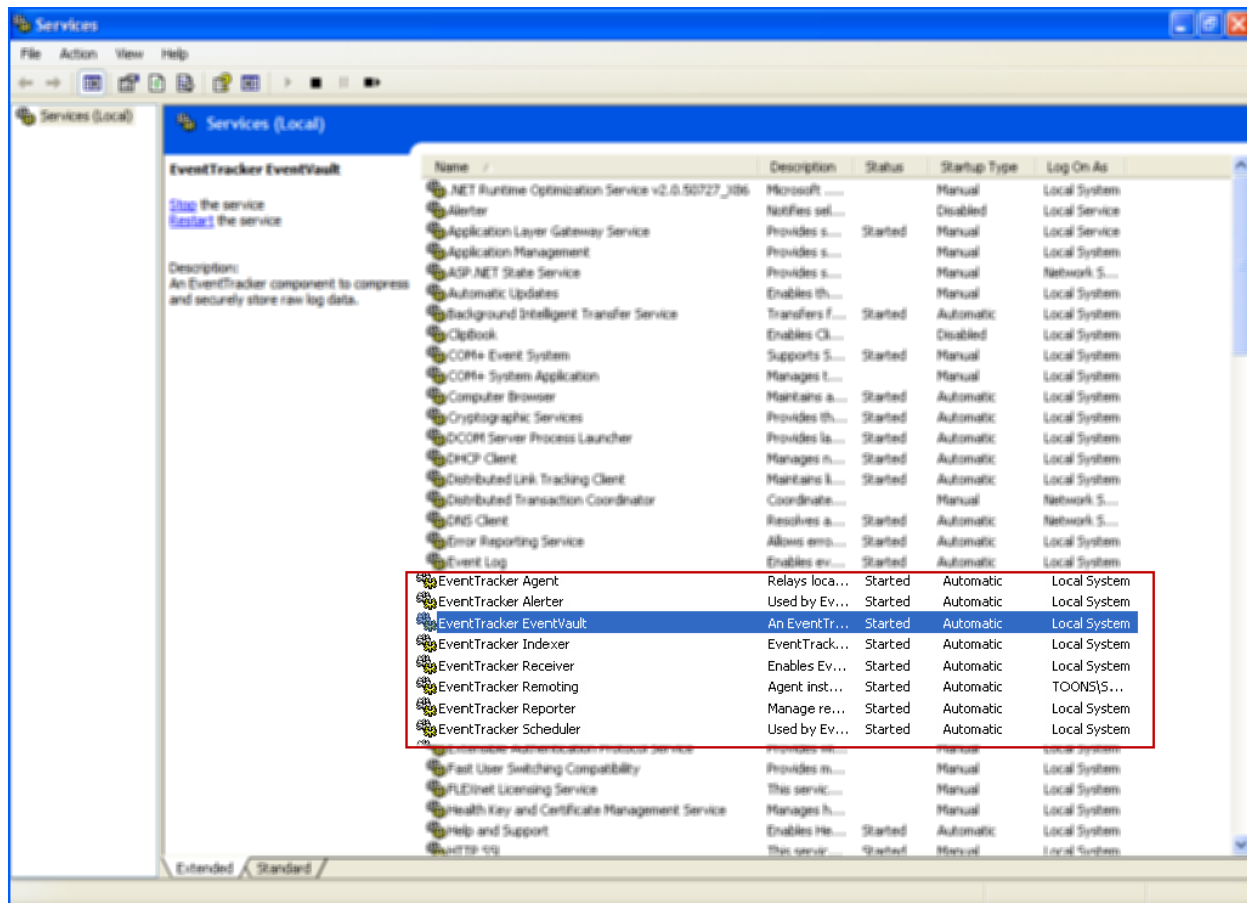


Figure 24

4. Right click the service name, and click **Properties**.

For example: Right click **EventTracker EventVault** service

'EventTracker EventVault Properties (Local Computer)' window will be displayed.

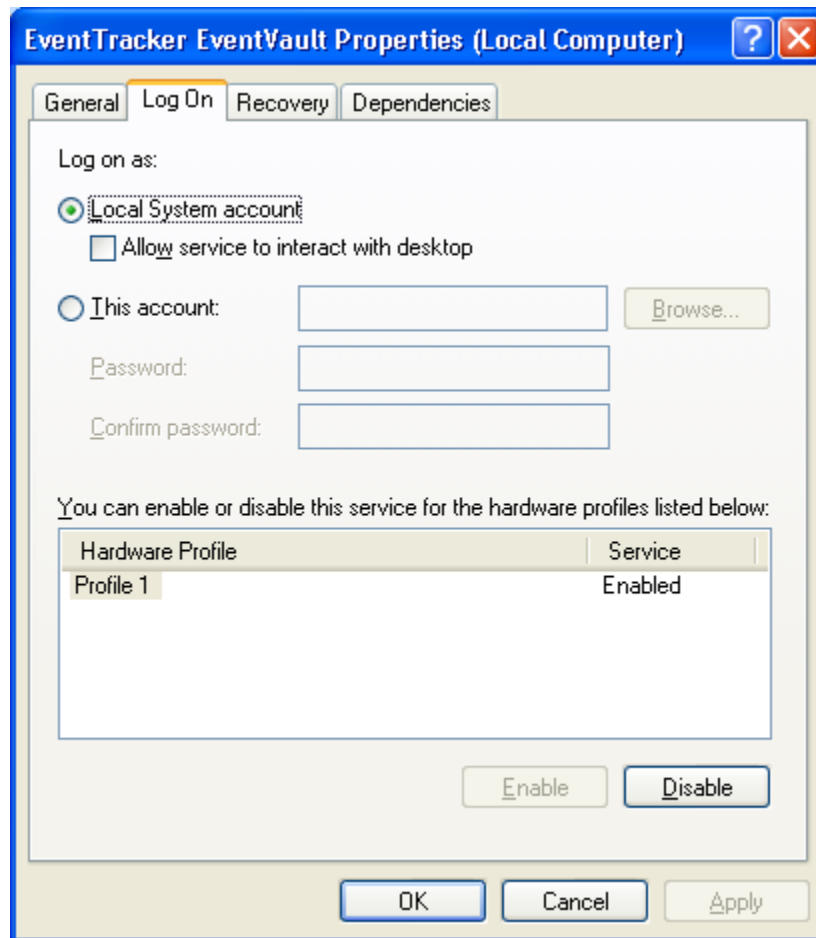


Figure 25

5. Click **Log On** tab, and select **This account** option.

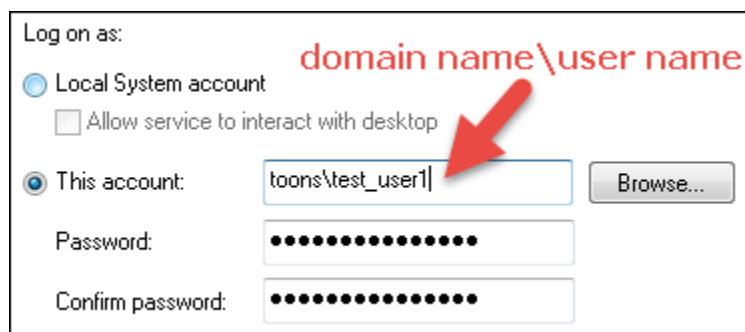


Figure 26

6. Enter the user credentials and correct password.
The user name should be in 'domain name \user name' format.
7. Click the **Apply** button.

Warning message will be displayed on the desktop.

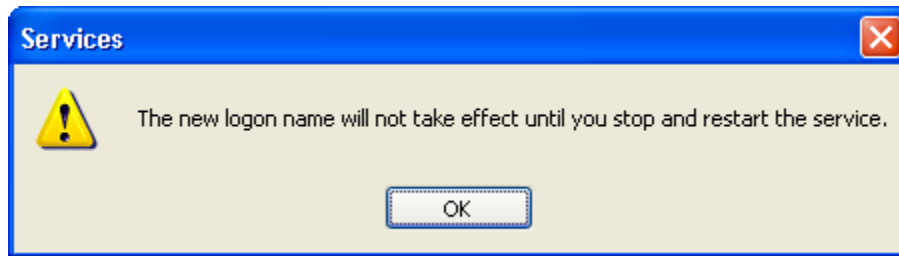


Figure 27

8. Click the **OK** button.
9. Click the **OK** button in 'EventTracker EventVault Properties (Local Computer)' window.
10. To run the service with new logon name, stop and start the service.
11. Likewise, for rest of the services, repeat step 4 to step 10 to change the service account.

The **Log On As** column will display the changed service account name.

Name	Description	Status	Startup Type	Log On As
Event Log	Enables ev...	Started	Automatic	Local System
EventTracker Agent	Relays loca...	Started	Automatic	Local System
EventTracker Alerter	Used by Ev...		Automatic	Local System
EventTracker EventVault	An EventTr...	Started	Automatic	toons\karen
EventTracker Indexer	EventTrack...	Started	Automatic	toons\karen
EventTracker Receiver	Enables Ev...	Started	Automatic	Local System
EventTracker Remoting	Agent inst...	Started	Automatic	toons\karen
EventTracker Reporter	Manage re...	Started	Automatic	toons\karen
EventTracker Scheduler	Used by Ev...	Started	Automatic	Toons\karen
Extensible Authentication Protocol Service	Provides wi...		Manual	Local System

Figure 28

NOTE: Give permission to user on the shared folder, under whom the web application is running. For adding user to the shared folder, follow the above steps mentioned.